



SIZE
2x2, 2x4
WATT
24W, 30W, 36W, 24W, 36W, 45W
CCT
3500K / 4000K / 5000K
DIMMING
0-10V
CRI
Ra>80
LUMINOUS EFFICACY (Lm/W)
130 lm/w
BEAM ANGLE
120°
INPUT VOLTAGE
120-277 VAC
OPERATING TEMPERATURE
-40°C ~ 50°C
LIFE SPAN
50,000+ Hrs



LED CENTER BASKET TROFFER LUMINAIRE

TK-CBT4 - SERIES

DESCRIPTION

schaezer® presents the LED 3 Color Tunable Center Basket Troffer, an advanced lighting solution designed for versatile applications in various settings.

The LED 3 Color Tunable Center Basket Troffer features a high-quality isolated driver, 0-10V dimming capability, and flicker-free operation. Its heavy-duty die-cast aluminum body is fully sealed, making it dirt and bug-proof. With an input voltage of 120-277 VAC, this troffer offers color temperatures of 3500K, 4000K, and 5000K, a luminous efficacy of 130 Lm/W, and a CRI of Ra>80. It is dimmable with a 0-10V system, has a beam angle of 120°, operates in temperatures ranging from -40°C to 50°C, and has a lifespan of over 50,000 hours.

Ideal for various office spaces, schools, shopping malls, supermarkets, retail shops, hospitals, laboratories, and dust-free workshops, the LED 3 Color Tunable Center Basket Troffer provides efficient and reliable lighting solutions.

This LED troffer is backed by a 5-year limited warranty and complies with ETL Listings, ensuring it meets stringent safety and performance standards. It is rated for both damp and dry locations, guaranteeing durability and peace of mind in diverse environments.



LED CENTER BASKET TROFFER LUMINAIRE

TK-CBT4 SERIES

Applications

These lights apply in various types of office spaces and schooling environment Commercial includes lighting shopping malls,supermarkets, retail shops, etc. Other applications such as hospitals, laboratories,and dust-free workshops.

Quick Ship:

TK-CBT4-22-24W-T-DUV-(3500K-4000K-5000K) [EM,MS,BM,Blank]

TK-CBT4-22-30W-T-DUV-(3500K-4000K-5000K) [EM,MS,BM,Blank]

TK-CBT4-22-36W-T-DUV-(3500K-4000K-5000K) [EM,MS,BM,Blank]

TK-CBT4-24-24W-T-DUV-(3500K-4000K-5000K) [EM,MS,BM,Blank]

TK-CBT4-24-36W-T-DUV-(3500K-4000K-5000K) [EM,MS,BM,Blank]

TK-CBT4-24-45W-T-DUV-(3500K-4000K-5000K) [EM,MS,BM,Blank]

Controls / Dimming

High quality isolated driver; 0-10V dimmable;Flicker free. Optional Motion Sensor. Heavy duty die-cast aluminum body, fully sealed, dirt & bug proof.

Warranty

5 Years Limited Warranty.

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities.

Ordering Information


Example: TK-CBT4-22-24W-T-DUV

TK	CBT4	22	24W	T	DUV	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Code	Series	Length	Watts	Color Temp	Dimmable	
TK	CBT4 - Center Basket Troffer Gen4	22 - 2x2 Feet 24 - 2x4 Feet	24W/30W/36W 24W/36W/45W } Wattage Selectable	35K - 3500K T - 40K - 4000K 50K - 5000K } CCT Selectable	D - 0-10V Dimming Voltage UV - 120-277VAC (Universal Volatage)	Blank - no any function EM - Emergency Driver (8W) 90 mins MS - Motion Sensor BM - Bluetooth

LED CENTER BASKET TROFFER LUMINAIRE


TK-CBT4 SERIES

Photometrics

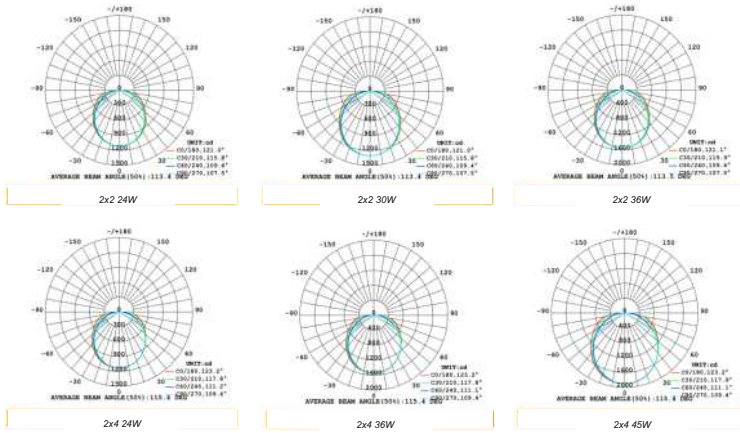

Infographics

1. Remove 2X2 or 2X4mm tile from ceiling. Put on the LED troffer.

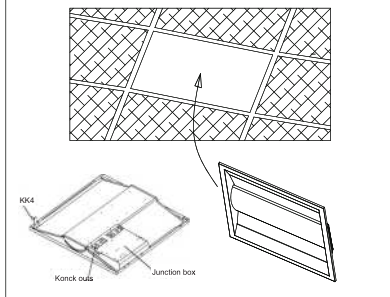

2. Use the protective brackets for safety.

