



SIZE
4 ft, 8 ft
WATT
24W, 32W, 40W
CCT
3500K / 4000K / 5000K
DIMMING
0-10V
CRI
80+
LUMINOUS EFFICACY (lm/W)
130 lm/w
INPUT VOLTAGE
100 - 277 VAC
OPERATING TEMPERATURE
-15.5°C ~ 50°C
PH
0.9
LIFE SPAN
50,000+ Hrs

LED STRIP FIXTURE

TK-LBS3-SERIES

DESCRIPTION

Schaezer[®] presents the LED Strip Fixture, a state-of-the-art lighting solution engineered for efficiency and reliability in various commercial and industrial settings. This STRIPS/LOWBAYS fixture features a PC frosted lens and flicker-free 0-10V dimming, along with motion and PIR sensors for enhanced functionality and emergency backup for added safety. With an impressive lifespan of over 50,000 hours, it ensures long-term performance and low maintenance.

The LED Strip Fixture operates on an input voltage range of 100-277 VAC and offers selectable color temperatures of 3500K, 4000K, and 5000K. With a luminous efficacy of 130 lm/W and a high Color Rendering Index (CRI) of 80+, it delivers clear and bright illumination. The fixture supports 0-10V dimming, features a power factor of 0.9, and performs reliably in temperatures ranging from -15.5°C to 50°C.

Ideal for warehouses, garages, stairwells, storage areas, and damp or harsh environments, the LED Strip Fixture provides versatile and efficient lighting solutions. Its robust design and advanced features make it suitable for demanding applications where durability and performance are crucial.

Backed by a 5-year limited warranty and compliant with ETL and DLC Premium Listings, the LED Strip Fixture ensures quality and safety standards are met. Choose Schaezer's LED Strip Fixture for a reliable, high-performance STRIPS/LOWBAYS lighting solution tailored to modern industrial and commercial needs.



LED STRIP FIXTURE

TK-LBS3 SERIES

Applications

This fixture is widely used at warehouses, garages, stairwells, storage areas, and damp or harsh environments

Quick Ship:

TK-LBS3-4FT-24WD(35K-40K-50K)-A-T

TK-LBS3-4FT-32WD(35K-40K-50K)-A-T

TK-LBS3-4FT-40WD(35K-40K-50K)-A-T

Controls / Dimming

PC Frosted lens, 0-10V dimming Flicker free, Motion Sensor, Emergency Backup, PIR sensor. 50,000 working hours

Warranty

5 Years Limited Warranty. See warranty documentation for more information.

Installation / Mounting

The installation process is straight forward and offers a range of mounting possibilities with the help of an universal mounting plate preinstalled at the bottom. Surface or Suspended mounted are optional.

Ordering Information


Example: TK-LBS3-4FT-20W-35K-A-T

TK	LBS3	4FT	24W	T	DUV	Optional	Linkable
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Code	Series	Length	Watts (Wattage Selectable)	Color Temp	Dimmable	[BLANK]	[BLANK]
TK	LBS3 - LED Strip Fixture	4FT - 4 Feet 8FT - 8 Feet	4FT - 20W/32W/40W 8FT - 40W/65W	30K - 3000K T - 40K - 4000K 50K - 5000K 3 CCT } Selectable	D - 0-10V Dimming Voltage UV - 100-277VAC (Universal voltage)	MS - Motion Sensor EM - Emergency Driver BM - Bluetooth	Blank - Can't Linkable 2 - 2pcs Link 3 - 3pcs Link 4 - 4pcs Link 5 - 5pcs Link 6 - 6pcs Link 7 - 7pcs Link

LED STRIP FIXTURE

TK-LBS3 SERIES

Dimension

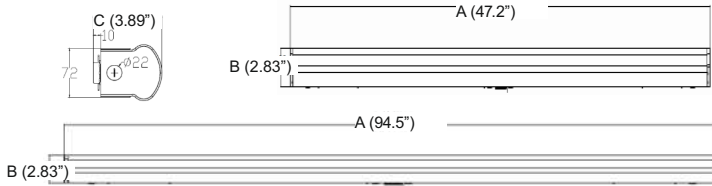

Part Number	A (Length)	B (Width)	C (Height)
TK-LBS3-4FT-XXW	47.2"	2.83"	3.89"
TK-LBS3-4FT-XXW	94.5"	2.83"	3.89"

Product Features



Ceiling Mount



Pendant Mount



Linkable

Wiring Diagram & CCT Wattage Selectable Switch

